




## Users guide for R93 trigger

### Installation on Offroad and Professional

1. Remove bolt and magazine
2. loose screw in the magazine bay and on the cover plate
3. pull down original trigger
4. position new R93 trigger instead of removed original trigger
5. hand tighten screw of the cover plate and the magazine bay
6. install bolt and magazine

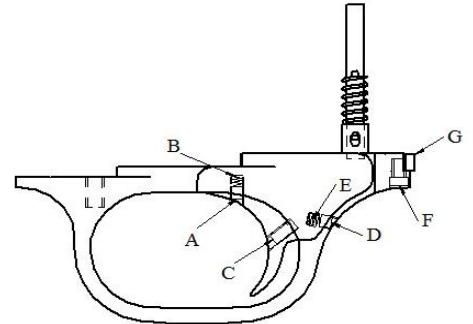

### Installation on a wooden stock

1. Remove bolt and magazine
2. loose screw in the magazine bay
3. pull down original trigger
4. remove screw **F** (socket screw 2mm) and the small bracket **G** from new R93 trigger.
5. hold gun in a vertical position. Insert the small bracket **G** centred into the slot for the trigger system
6. insert the trigger carefully
7. hand tighten screw in the magazine bay
8. hand tighten screw **F** on trigger
9. install bolt and magazine

### Adjustment of the trigger

The trigger force is individually adjustable (to increase turn in clockwise direction) with screw **A** (socket screw 1,5mm) and you may select between three option of springs (part of delivery) to install: Soft, Medium , Strong

The adjustment ranges are for:

SOFT (Standard version, wire diameter 0.32mm) = **150 grams to 500 grams**

MEDIUM (wire diameter 0.40mm) = **450 grams to 750 grams**

STRONG (wire diameter 0.40mm) = **700 grams to 1200 grams**

To replace the spring **B** loose screw **A** and replace the spring **B** behind with SOFT, MEDIUM or STRONG spring. Tighten screw **A** so far as you have reached the trigger force you wish. For the **STRONG setup**, additionally you have to replace spring **E** (wire diameter 0.25mm) behind screw **D** with the medium spring (wire diameter 0.32mm).

The engagement of detent is also adjustable with screw **C** (socket screw 1,5mm, turn clockwise - less engagement).

**WARNING: to less adjusted detent and to weak adjusted trigger are very dangerous and can cause serious injuries.**

**!!!IMPORTANT: The proper function must be checked and given as follows: uncocke the system with the cocking handle, press the trigger and cock the system with the cocking handle!!**

In any case the installation and/or the adjustment of the trigger are strongly recommended by well instructed specialists only. However the safe function must be checked after each handle on the trigger system.

Company "BIX'N ANDY" assumes no liability.

**EIGENE JAGD- & SPORTWAFFEN - WAFFEN- & MUNITIONSHANDEL – WIEDERLADER-SERVICE – SCHÄFTEREI**  
 Inh. Büchsenmachermeister Andreas Atzl, A-6330 Kufstein, Weissach 21, Tel.: 0043/(0)53 72/66 6 86, Fax 0043/(0)53 72/66 6 86-4  
 Bankverbindung: Sparkasse Kufstein, BLZ 20506, Kto.-Nr. 1400-000046, UID-Nr. ATU 38154705, IBAN AT442050601400000046,  
 BIC SPKUAT22

e-mail: andy@bixn-andy.at, www.bixn-andy.at